



Multiple Real Time Video to Your Video Wall

The Vporter is a video capture PCI plug-in card which has been designed to operate in conjunction with the Xpander card and software. The Vporter, when combined with the Xpander provides up to 8 separate video overlay windows. The Vporter enables you to bring 4 or 8 video sources such as cameras, dvd players and satellite to your videowall. The VPorter can be positioned and sized anywhere in the videowall. Together with Xpander, the Vporter offers the complete solution for videowalls that merge video and data into your video wall.

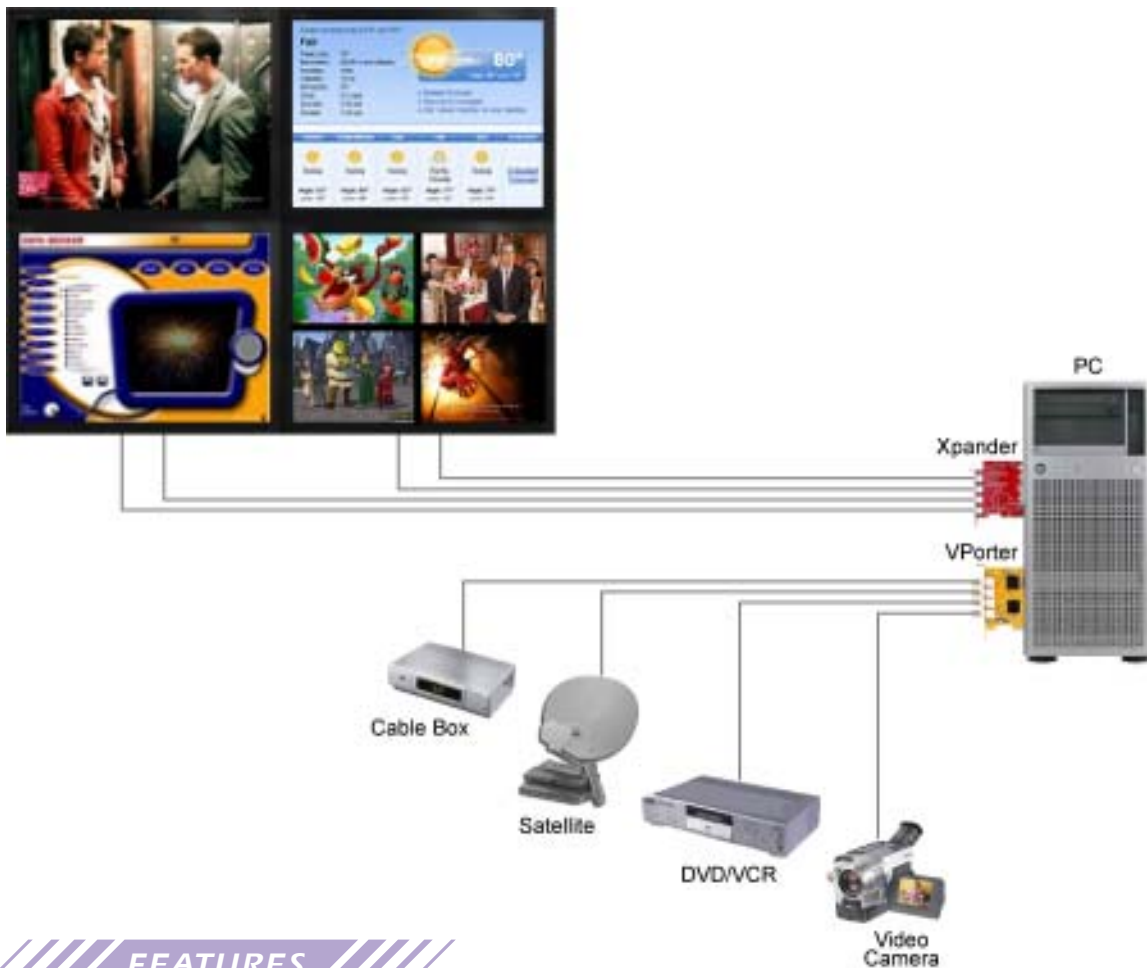

FEATURES

- ▲ *Video overlay windows are updated in real time with zero CPU overhead.*
- ▲ *Multi-standard video support, PAL, NTSC, SECAM.*
- ▲ *Multiple Vporter cards supported.*
- ▲ *Overlay windows can be randomly sized, overlapped and positioned anywhere on the Windows desktop.*
- ▲ *Multi-screen support, no position or size restrictions.*
- ▲ *Separate controls for brightness, contrast, color and cropping.*
- ▲ *Fully controlable using the Presenter Wall control software.*
- ▲ *WindowsXP support.*

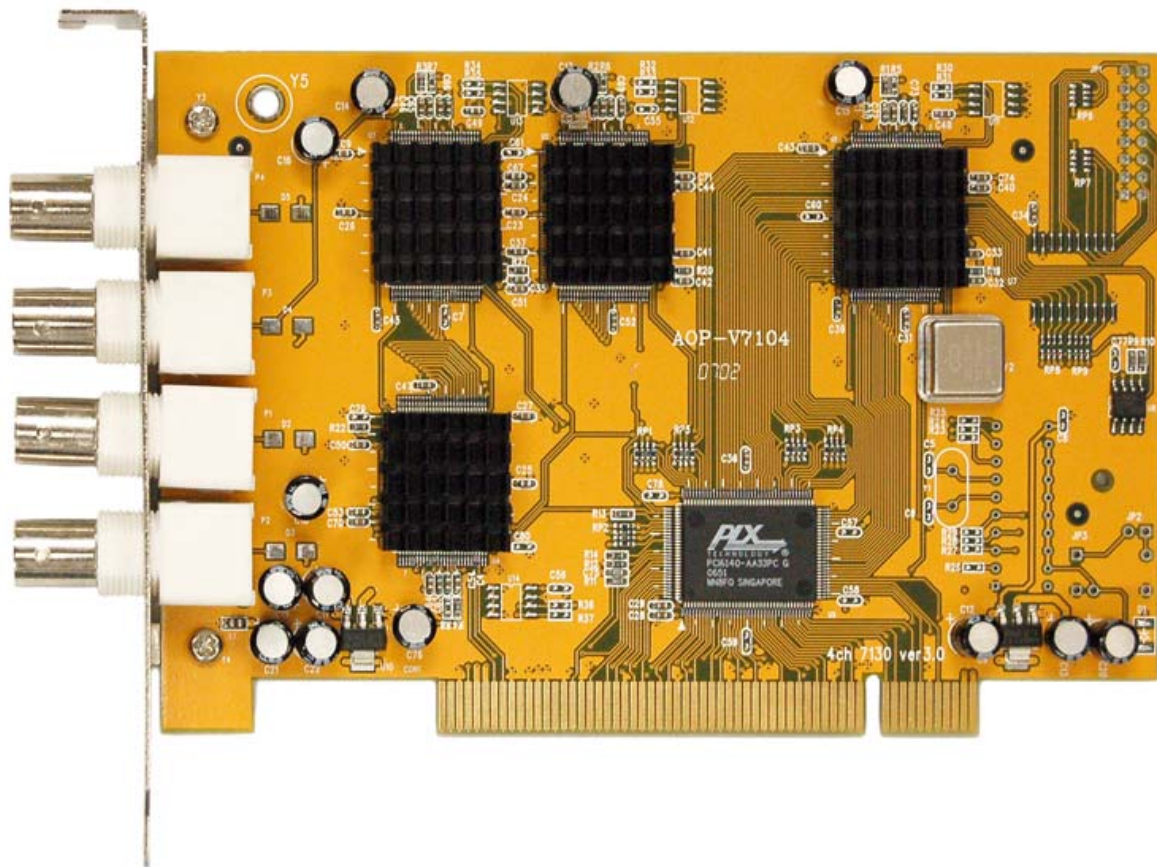

SPECIFICATIONS

Card Type	PCI 2.2 Compliant Adapter
Card Size	100 x 260 (mm)
No. Overlay Windows	Maximum 8 overlay windows
Capture Resolution	Maximum capture resolution per channel (768 x 288)
Supported Video Formats	PAL, NTSC, SECAM
Inputs per Overlay Window	4 BNC for 4 port DB25 for 8 port
Power Consumption	12 Watts
Power Requirements	+5V at 2.2 Amps, +12V at 100mA

ORDER INFO

MODEL	Description
AP-VP04	4 Port PCI Video Capture Card
AP-VP08	8 Port PCI Video Capture Card