

Connect up to 4 HDTV devices to single HDMI source.




Connects up to 4 HD Monitors to single HDMI source. This advanced splitter allows you to display single HDMI source (set top box, DVD player, video game stations, computer) to multiples HDTV Displays. This splitters passes both digital and audio signals through the HDMI ports.

FEATURES

- ▲ Connects up to 4 HDTV display devices to a single HDMI source.
- ▲ Maintains 480p, 720p, 1080i and 1080p video formats.
- ▲ Maintains highest HDMI single link video resolution and digital audio.
- ▲ Supports HDCP compliant devices.
- ▲ Both HDMI-HDMI and DVI-HDMI cables can be used to connect the inputs and splitter output.

Application Diagram

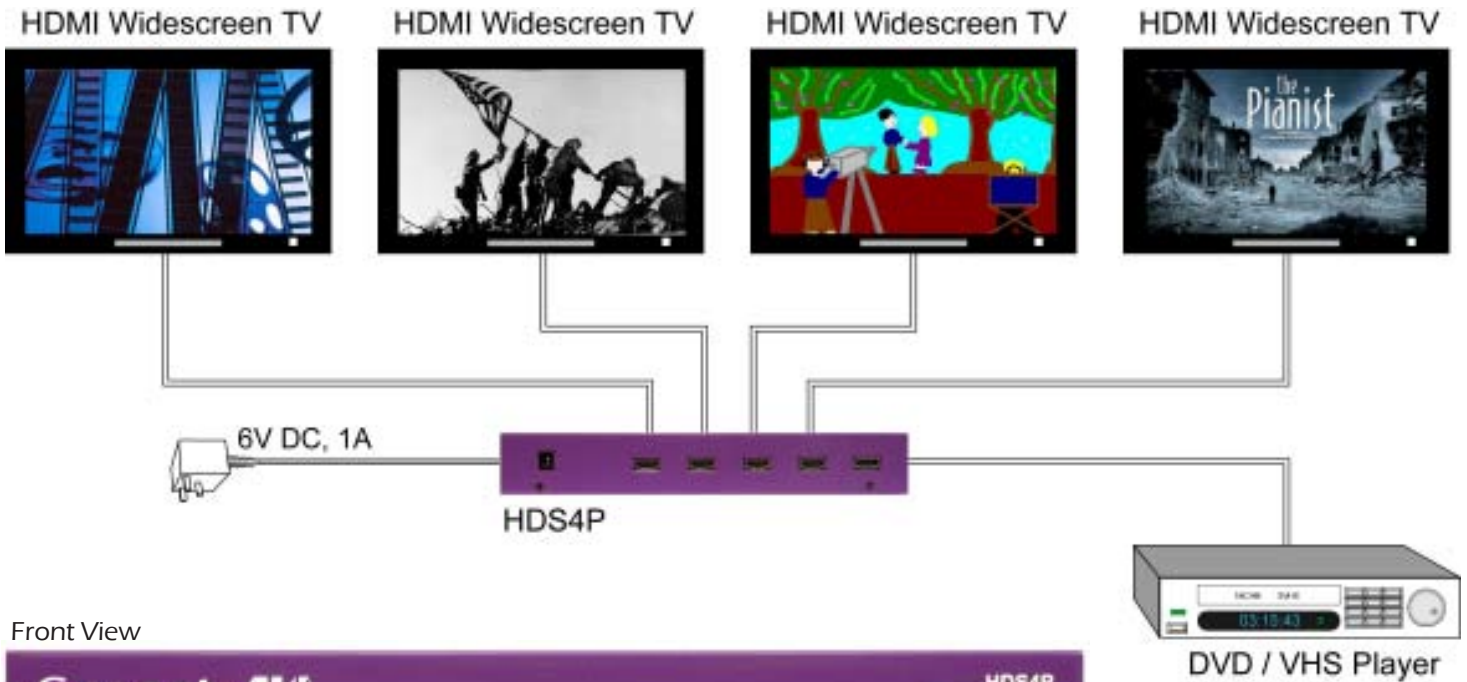

Front View



Rear View



SPECIFICATIONS

Operating Humidity Range	5 to 90 % RH (no condensation)
Video Amplifier Bandwidth	140mHz
Input Video Signal	0.5-1.0 volts p-p
Input DDC Signal	5 volts p-p (TTL)
Max Single Link Range	1280 x 1024, 1080i
Output Video	HDMI+HDCP1.0/1.1
Vertical Frequency Range	60Hz
Power Consumption	15 Watts (max.)
Power Supply	12VDC
Dimensions (inches)	(W)10.63" x (H)1.575" x (D)7.875"
Mass (Pounds)	4.41 lbs

ORDER INFO

Model	Description
HDS4P	HDMI/Digital Video and Audio 4 port splitter

Applications

- ▶ Hotel
- ▶ Cable TV remote control
- ▶ Control rooms
- ▶ Remote On-Digital set-top control
- ▶ Sky box control extension and switcher output
- ▶ Dealer rooms
- ▶ Point of Sale
- ▶ Remote VCR control

SmartAVI, Inc.

3111 Winona Ave, Suite 101
 Burbank, CA 91504
 Tel: (818) 565-0011
 Fax: (818) 565-0020
 Email: info@smartavi.com
 www.smartavi.com